




Ruville BEARING COMPANY

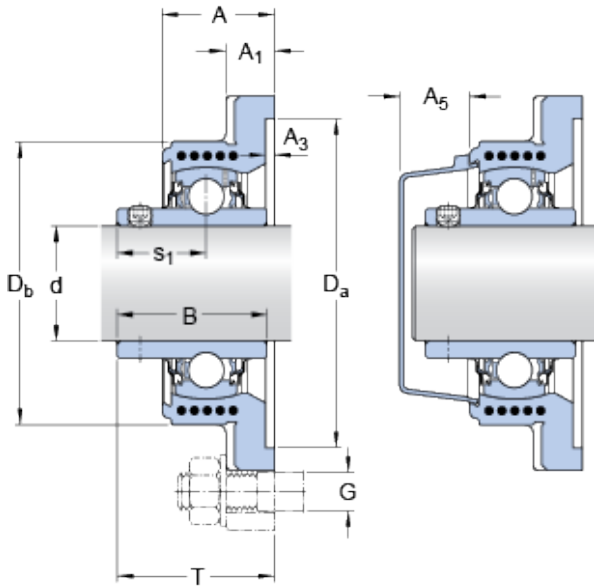

FYK 40 TR Bearing 2D drawings and 3D CAD models

SKF FYK 40 TR bearing units

Bearing No. FYK 40 TR

Size	40x39x17 mm
Bore Diameter	40 mm
Outer Diameter	39 mm
Width	17 mm
d	40 mm
A	39 mm
A ₁	17 mm
A ₃ - H14	3.2 mm
A ₅	23.5 mm
B	49.2 mm
D _a - H11	115.9 mm
D _b	98 mm
J	101.5 mm
L	130 mm
H	14.8 mm
s ₁	30.2 mm
T	54.2 mm
Basic dynamic load rating - C	30.7 kN
Basic static load rating - C ₀	19 kN
Fatigue load limit - P _u	0.8 kN
Limiting speed	2800 r/min
Mass bearing unit	0.84 kg
Thread - G ₂	M8x1
Hexagonal key size for grub screw - H	4 mm



Ruville BEARING COMPANY

Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
UNSPSC	31171501
Weight / Kilogram	0.89
EAN	7316570862188
Product Group	M06110
Housing material	Composite
D _a	115.9 mm
D _b	98 mm
A ₁	17 mm
A ₃	3.2 mm
A ₅	23.5 mm
N	14.8 mm
s ₁	30.2 mm
Basic dynamic load rating C	30.7 kN
Basic static load rating C ₀	19 kN
Fatigue load limit P _u	0.8 kN
Thread grub screw G ₂	M8x1
Hexagonal key size for grub screw N	4 mm
Recommended tightening torque for grub screw	6.5 N · m
Recommended diameter for attachment bolts, mm G	12 mm
Recommended diameter for attachment bolts, inch G	0.5 in